

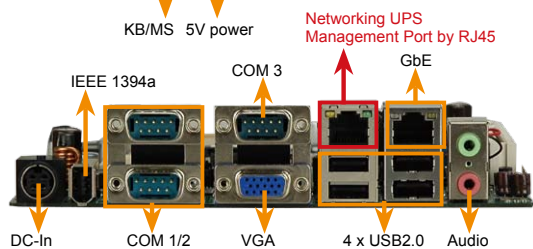


eKINO-9102/9152

Mini-ITX Motherboard with AUPS sub-system, Intel® Pentium®/ Celeron® CPU, Wide range 9-28VDC input

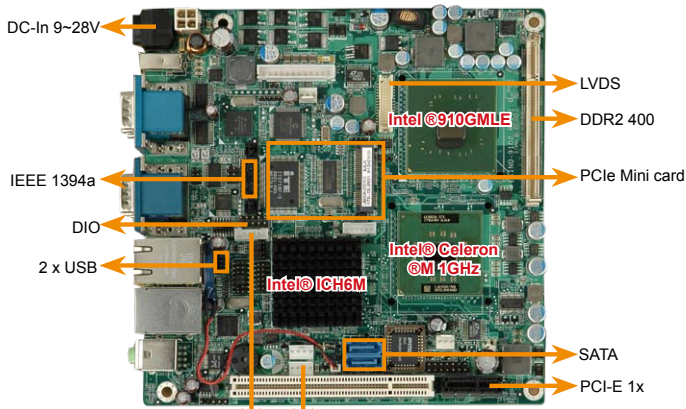

IEEE1394a port with bracket to 8pin(1x8) connector

19800-000103-RS

IEI AUPS sub-system Benefit:

- Provides power immediately and maintains power for certain period of time.
- Continues to provide stable power to equipment and absorbs power surges
- Smooth out noisy power sources.



IEI motherboard with AUPS sub-system kits

BATKIT-2S2P3800-R10

BAT-LI-2S2P3800
2S2P 7.4V 3800mAH

Base board

Connection board

Connection cable



Specifications

- ◆ Form Factor
Mini ITX
- ◆ CPU
On board Intel® Celeron® M 1GHz with 512K L2 Cache CPU
Socket479 Intel® Pentium®/ Celeron® CPU with 400/533MHz FSB
- ◆ System Chipset
Intel 910GMLE+ ICH6-M
Intel 915GME+ ICH6-M
- ◆ BIOS
AMI BIOS
- ◆ Memory
One 200-pin DDR2 400MHz SDRAM SO-DIMM supported (eKINO-9102 system max. 2GB)
One 200-pin DDR2 400/533MHz SDRAM SO-DIMM supported (eKINO-9152 system max. 2GB)
- ◆ Ethernet
1 x RTL8111CP PCIe GbE LAN controller
- ◆ Display Output
VGA Integrated in Intel® 910GMLE/915GME
24-bits dual-channel LVDS by Intel® 910GMLE/915GME
- ◆ Graphic
Intel® Graphics Media Accelerator 900
- ◆ I/O Interfaces
6 x USB2.0 2 x SATA with 5V DC output
2x RS-232 1x RS-232/422/485
2 x IEEE1394a(1 port by Rear IO, 1 port by CN3)
1 x 6pin box header (2.0mm pitch) for KB/MS
- ◆ Expansion
1x PCI 1x PCIe mini card 1 x PCIe x1
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/ 4-bit output
- ◆ Super IO
ITE IT8718F
- ◆ Audio
AC'97 with Realtek ALC655 codec
- ◆ DC connector
2pcs 1x4pin 5V power connector (Major for 2.5" HDD used)
- ◆ SSD
CompactFlash Type II
- ◆ WDT
Software programmable supports 1~255 sec. system reset
- ◆ Power Supply
Maximum input voltage range 9V~28V
Recommend operating input voltage range 12V~24V
1x external DIN 4pin DC jack
1x internal 2x2pin power connector
- ◆ Power Consumption
2.57A@12V(Intel® Celeron® M 1GHz with 2GB DDR2)
- ◆ Temperature
Operation: 0°C ~ 40°C with AUPS sub-system
Operation: 0°C ~ 60°C without AUPS sub-system
- ◆ Humidity
Operation: 5% ~95% non-condensing
- ◆ Dimensions
170mm x 170mm
- ◆ Weight
GW: 1100 g / NW: 400g

Features

1. Equipped AUPS sub-system as a simple UPS system
2. IBX600 Series Embedded System
3. Intel® Pentium® and Celeron® M FSB400/533 MHz CPU
4. Single voltage wide range 9~28VDC input
5. Support DDR2 400/533MHz SO-DIMM Memory up to 2GB
6. Support PCI Express Mini Card
7. VGA, 24 bits LVDS for Dual Display output
8. CF Socket for SSD Storage Expansion

Packing List

- 1 x eKINO-9102/eKINO-9152 single board computer
- 1 x KB/MS Y cable (PN:32000-023800-RS)
- 1 x I/O shielding (P/N:45014-0024C0-00-RS)
- 1 x Dual USB cable(PN:32000-070301-RS)
- 2 x SATA 5V power output cable Kits (P/N:32000-123000-RS)
- 1 x Mini Jumper Pack
- 1 x Utility CD
- 1 x QIG (Quick Installation Guide)

Ordering Information

Part No.	Description
eKINO-9102-1G512-R10	Mini-ITX Motherboard with AUPS sub-system, Intel® Celeron® M 1GHz 512K Cache CPU, 910GMLE, Wide range 9-28VDC input
eKINO-9102CF-1G512-R10	Mini-ITX Motherboard with AUPS sub-system, Intel® Celeron® M 1GHz 512K Cache CPU, 910GMLE, Wide range 9-28VDC input, CF Card
eKINO-9152-R10	Mini-ITX Motherboard with AUPS sub-system, Intel® Pentium®/ Celeron® CPU, 915GME, Wide range 9-28VDC input
eKINO-9152CF-R10	Mini-ITX Motherboard with AUPS sub-system, Intel® Pentium®/ Celeron® CPU, 915GME, Wide range 9-28VDC input, CF Card
IBX-600-9102UPS-R10/CM373/1GB	Embedded system with UPS function, Intel® Celeron® M 1 GHz 512K cache CPU, 910GMLE, 1GB DDR2, 802.11b/g wireless, Li-ion Battery(2S2P), 9~28VDC in, 60W adaptor, white, RoHS
CF-479B-RS	CPU Cooler (50mm x 50mm x 26mm, 50W)
WMPCIE-V01-R10	PCIe Mini card wireless LAN Module
BAT-LI-2S2P3800	2S2P 7.4V 3800mAH SMART BATTERY
BATKIT-2S2P3800-R10	2S2P 7.4V 3800mAH AUPS BATTERY KIT
19800-000103-RS	Single port IEEE1394a Cable
63000-FSP0601AD101C746-RS	60W/12V Power Adaptor 90VAC~260VA, DIN 4 PIN
SAIDE-KIT01-R10	SATA to IDE/CF Converter board