

## IEM-LX


ETX 2.8

AMD LX800 Highly Integrated ETX Module



ETX CPU Module with AMD® LX800 CPU on-board, USB 2.0, LAN &amp; Audio

Solder Side




DDR400



## Specifications

- ◆ CPU  
On board AMD® Geode™ LX800(500MHz) processor
- ◆ System Chipsets  
AMD® LX800 + AMD® CS5536
- ◆ BIOS  
Award BIOS
- ◆ System Memory  
One 200-pin 400/333MHz DDR SDRAM SO-DIMM Supported (System max. 1GB)
- ◆ Ethernet  
10/100Mbps RTL8100C Ethernet chipset
- ◆ I/O Interface  
4 x USB 2.0  
1 x LPT/FDD  
1 x IDE  
2 x RS-232  
1 x PS/2 KB/MS
- ◆ Expansions  
4 x PCI bus master  
ISA support by IT8888G
- ◆ Audio  
AC'97 Codec Realtek ALC203
- ◆ SSD  
CF Type II
- ◆ Super I/O  
W83627EHG
- ◆ Display Interface  
VGA integrated in AMD® LX800  
24-bit TTL (optional)  
18-bit single channel LVDS
- ◆ Watchdog Timer  
Software programmable supports 1-255 sec. system reset
- ◆ Power Supply  
AT/ATX support
- ◆ Power Consumption  
5V@0.92A (AMD LX-800 CPU with DDR 333MHz 256MB RAM)
- ◆ Temperature  
Operating: 0°C ~ 60°C(32 ~ 140° F)
- ◆ Humidity  
Operating: 5% ~ 95%, non-condensing
- ◆ Dimensions  
95 mm x 114 mm
- ◆ Weight  
GW: 650 g; NW: 250 g

## Dimensions (mm)

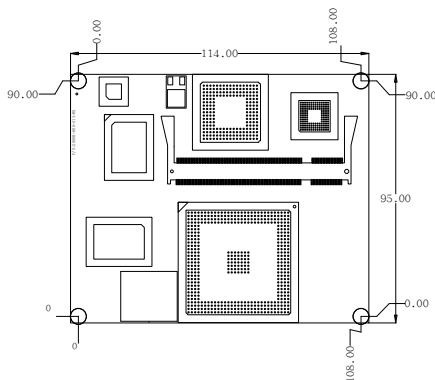

## Packing List

- 1 x IEM-LX single board computer
- 1 x Utility CD
- 1 x QIG
- 1 x screw kit

## Ordering Information

Part No.	Description
IEM-LX-800-R10	AMD LX800 500MHz processor, VGA/LVDS/TTL, LAN & Audio
IEM-LX-CE060	Windows®CE 6.0 Image & BSP S/W CD, Licensed Sticker (w/o CPU board)
IEM-LX-CE050	Windows®CE 5.0 Image & BSP S/W CD, Licensed Sticker (w/o CPU board)
IEM-LX-XPE	Windows®XP Embedded Image & SLD S/W CD, Licensed Sticker (w/o CPU board)

## IEM-DB-7S-RS-R30


Full Function ETX Baseboard with VGA/LVDS/TTL, Audio, CF Type II and Digital I/O



## Specifications

CPU Module Interface	ETX Form Factor
LCD Interface	1x30-pin, 18-bit dual-channel LVDS
Expansion Slot	1x40-pin, 24-bit TTL
SSD	4 x PCI, 3 x ISA
Audio	CF Type II
Ethernet Connector	Line-in, Speaker out, Mic-in
RS-232	1 x RJ-45
RS-232,422,485	1
KB/MS	2 x PS/2
VGA	1
USB 2.0	4
IDE Connector	2
LPT/ FDD	1
Digital I/O	4 Inputs, 4 Outputs
IR Connector	5 pin-header
Power Supply	ATX

## Dimensions (mm)

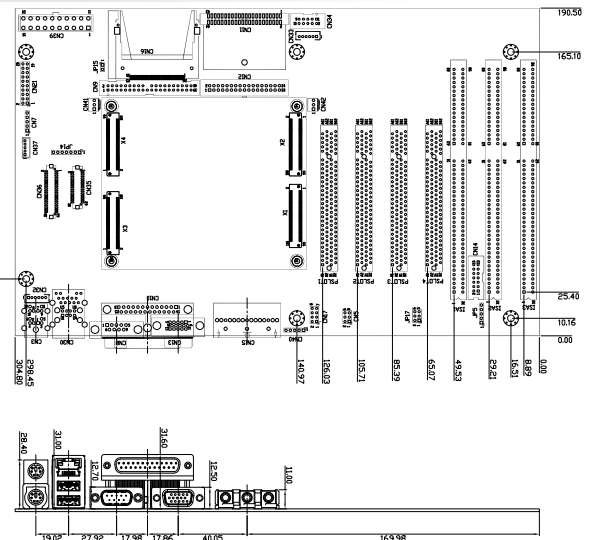

## Packing List

- 1 x IEM-Baseboard Single Board Computer
- 1 x FDD Cable (P/N: 32200-000017-RS)
- 1 x HDD Cable (P/N: 32200-000052-RS)
- 1 x RS-232/422/485 Cable (P/N: 32200-000063-RS)
- 1 x Mini Jumper Pack
- 1 x User Manual

## Ordering Information

Part No.	Description
IEM-DB-7S-RS-R30	ATX Size 7 Slots ETX Baseboard