
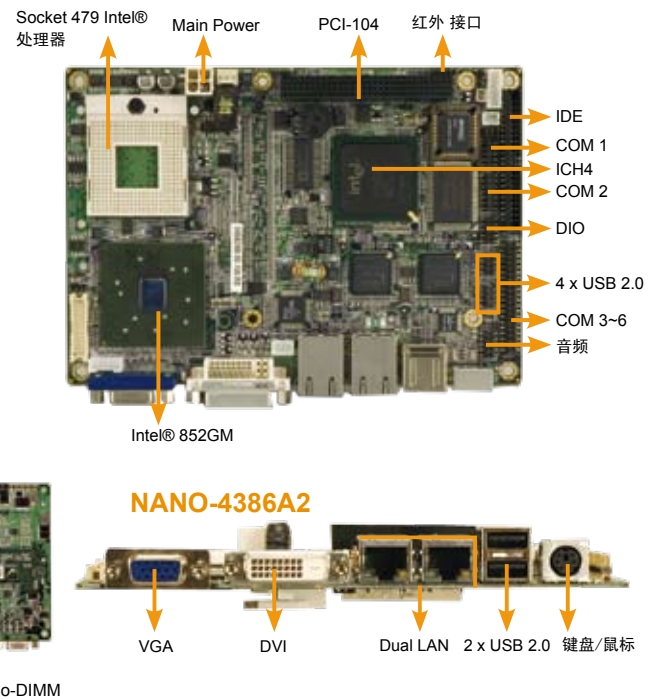


# epic NANO-4386A/A2

EPIC 工业主板, 支持Intel® Pentium® M/ Celeron® M CPU, VGA/LVDS, 双 GbE, 音频 和 6 x COM

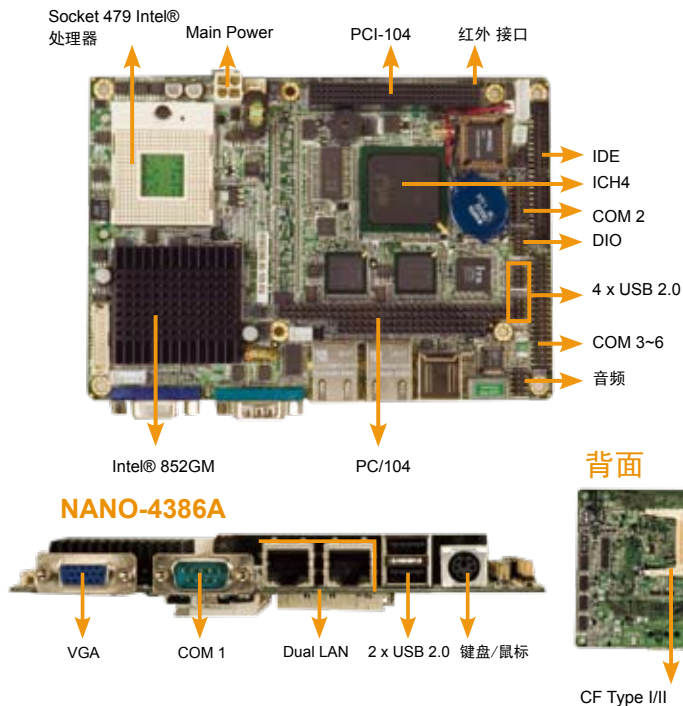

DDR266

FSB400

12V Only

Gigabit Ethernet

USB

## 规格

- ◆ CPU  
Socket 479 Intel® Pentium® M, Celeron® M 处理器支持 400MHz FSB  
板载 Intel® Celeron® M 600MHz 512KB或1GHz 零缓存处理器
- ◆ 系统芯片组  
Intel® 852GM + ICH4
- ◆ BIOS  
AMI BIOS
- ◆ 内存  
1 x 200-pin 266/200MHz DDR SDRAM SO-DIMM (系统最大支持 1GB)
- ◆ 网络  
2 x Intel® 82551ER 网络 芯片组  
2 x Intel® 82541PI GbE 芯片组
- ◆ I/O 接口  
5 x RS-232  
1 x RS-232/422/485  
6 x USB 2.0  
1 x IDE  
1 x PS/2 键盘/鼠标
- ◆ 扩展槽  
PCI/104-Plus (NANO-4386A only)  
PCI-104 (NANO-4386A2 仅有)
- ◆ 数字 I/O  
8-bit 数字 I/O, 4-bit 输入/ 4-bit 输出
- ◆ 红外接口  
1 x 红外接口透过针头
- ◆ Super I/O  
Winbond W83627UHG
- ◆ 显示 接口  
VGA 集成于 Intel® 852GM  
18-bit 双通道 LVDS  
DVI (NANO-4386A2仅有)
- ◆ 音频  
Realtek ALC655 支持 AC'97 解码
- ◆ 固态电子盘  
CF Type II
- ◆ 看门狗  
软件可编程, 支持1~255系统重启
- ◆ 电源  
AT/ATX 电源
- ◆ 功耗  
12V@2.7A, 5VSB@ 0.22A  
(Intel® Celeron® M 1.4GHz CPU 与 512MB DDR 333MHz)
- ◆ 工作温度  
0°C ~ 60°C (32°F ~ 140°F)
- ◆ 相对湿度  
5% ~95% 无冷凝
- ◆ 尺寸  
115 mm x 165 mm
- ◆ 毛重  
GW: 800 g / NW: 233 g

## 特征

1. EPIC 主板和 RoHS 无铅制程
2. Intel® Pentium® M/ Celeron® M CPU 支持 400MHz FSB
3. 1 x DDR266MHz SO-DIMM 内存最大支持 1GB
4. 6 x COM, 6 x USB 2.0, LVDS

## 包装清单

1 x NANO-4386A or NANO-4386A2 Single Board Computer
1 x IDE Flat Cable 44p/44p (P/N: 32200-000009-RS)
1 x Audio Cable (P/N: 32000-072100-RS)
1 x 4 RS-232 适配器线材 (P/N: 32200-025401-RS)
1 x PS/2 KB/MS Y-Cable (P/N: 32000-000138-RS)
1 x Power Cable (P/N: 32100-087100-RS)
1 x Mini Jumper Pack
1 x Utility CD
1 x QIG (Quick Installation Guide)

## 订购信息

型号	描述
NANO-4386A-R10	Socket 479 Intel® Pentium® M/ Celeron® M CPU with VGA/LVDS, Dual GbE, Audio and 6 x COM
NANO-4386A-1GZ-R10	EPIC Intel® ULV Celeron® 1GHz 零Cache CPU with VGA/LVDS, Dual LAN, Audio and 6 x COM
NANO-4386A-1G512-R10	EPIC Intel® ULV Celeron® 1GHz 512KB Cache CPU with VGA/LVDS, Dual LAN, Audio and 6 x COM
NANO-4386A-600-R10	EPIC Intel® ULV Celeron® 600MHz 512KB Cache CPU with VGA/LVDS, Dual LAN, Audio and 6 x COM
NANO-4386A2-R10	EPIC Intel® Pentium® M/ Celeron® M CPU with VGA/LVDS/DVI, Dual GbE, Audio and 6 x COM
NANO-4386A2-1GZ-R10	EPIC Intel® ULV Celeron® 1GHz 零Cache CPU with VGA/LVDS/DVI, Dual LAN, Audio and 6 x COM
NANO-4386A2-600-R10	EPIC Intel® ULV Celeron® 600MHz 512KB Cache CPU with VGA/LVDS/DVI, Dual LAN, Audio and 6 x COM
32200-026500-RS	RS-232/422/485 Cable
32000-070300-RS	USB Cable
CF-479B-RS	CPU Cooler
IO-KIT-4COM-R10	4 COM Ports Adapter Board